



+ GET UP TO \$250
IN REBATE FROM YOUR LOCAL
UTILITY COMPANY



NAME: LED WALL PACK

P/N: RL-WP-100W-D-LV-N-YY

Advantage

- UL cUL DLC certificate
- IP65 Internal driver, input voltage AC100-277V
- No UV or IR in the beam
- Easy to install and operate
- Energy saving, long lifespan
- Light is soft and uniform, safe to eyes
- Instant start, NO flickering, NO humming
- Green and eco-friendly without mercury.




LIGHTNING PROTECTION SYSTEMS

This wall pack has been rigorously tested to provide maximum protection for building exteriors.

Application

- Lighting factory
- Outdoor landscape lighting
- Building, the hotel, such as building exterior wall

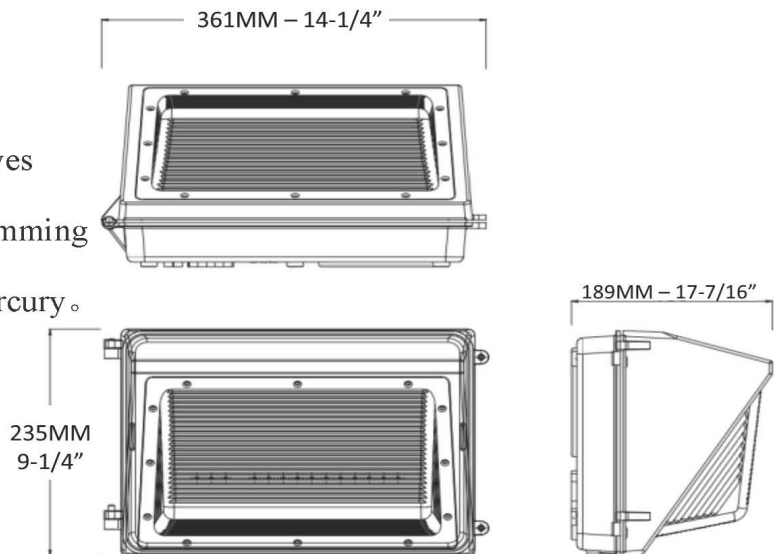

Product Specifications

LED WALL PACK LIGHT

SPECIFICATIONS

- ★ L70>60600 Hours
- ★ Commercial/Architectural Grade
- ★ Architectural UV resistant powder coat finish
- ★ Lighting Facts™ Uniform LM-79 Reporting Template
- ★ UL Listed
- ★ Photo-electric Switch (Optional) – Listed (WJCT),
- ★ System Watts: 100W
- ★ Voltages: 100-277Vac
- ★ CRI:70+
- ★ IP65
- ★ Operating Temp: -30 °C to +70 °C
- ★ Operating Humidity: 20% to 90%RH
- ★ Power Fact(PF) : 0.99
- ★ Power Supply Efficiency: > 90%
- ★ Color Temperature: 3000-5700K

ORDERING INFORMATION

Watts	ColorTemperature	Beam Angle	M/N	lumen Efficiency	Line voltage supply	Replace HID/MH
100W	3000K	100.61°	RL-WP-100W-D-LV- N-WW	119.32lm/w	100-277Vac	400-500W
100W	4000K	100.61°	RL-WP-100W-D-LV- N-NW	119.32lm/w	100-277Vac	400-500W
100W	5000K	100.61°	RL-WP-100W-D-LV- N-DW	119.32lm/w	100-277Vac	400-500W
100W	5700K	100.61°	RL-WP-100W-D-LV- N-CW	121.42lm/w	100-277Vac	400-500W